
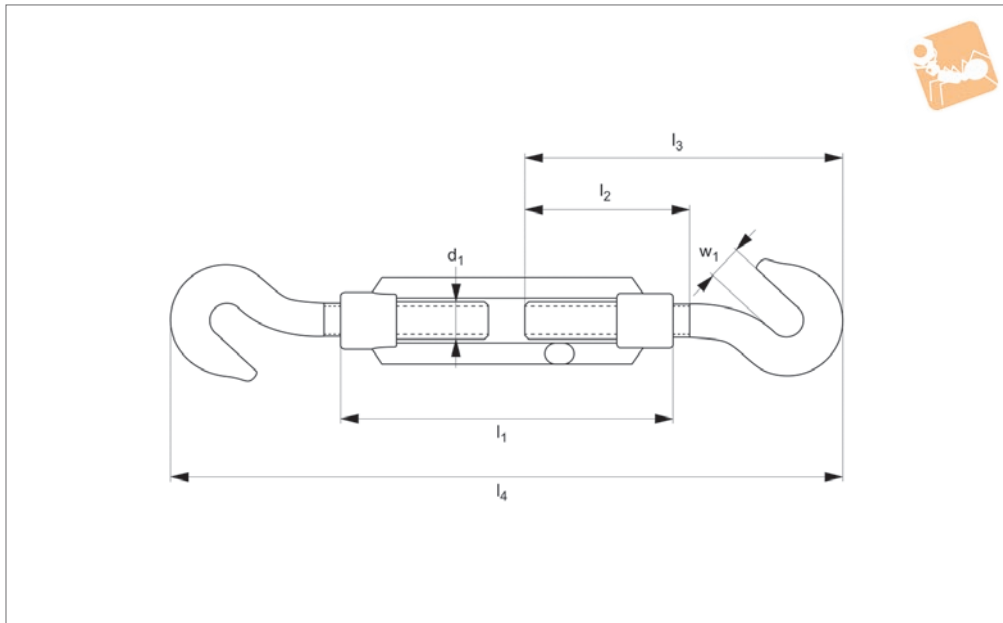


# Hook End Turnbuckles

steel

## Turnbuckles

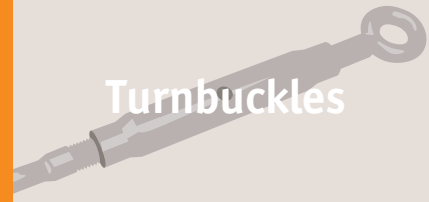

**R3844**

TURNBUCKLES

### Material

Steel (1.0037), zinc-plated.  
Hot dip galvanized body, available on request providing increased protection against corrosion. Please add -FZ for hot dip galvanized, e.g. R3804.006-FZ.

### Tips

Turnbuckles consist of a metal frame with right hand thread one end and left hand thread the other end. Used for tensioning by rotating turnbuckle body without twisting attached rope or cable.

**Only suitable for use in tension.**

### Technical Notes

To DIN 1480 hook to hook.

### Important Notes

**Turnbuckles are not to be used for lifting.**

Order No.	d <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub> min.	l <sub>4</sub> max.	w <sub>1</sub>	Weight kg
R3844.006-ZP	M 6	110	50	77.0	154	234	8.0	0.09
R3844.008-ZP	M 8	110	60	98.0	196	271	10.0	0.16
R3844.010-ZP	M10	125	73	116.5	233	318	12.5	0.27
R3844.012-ZP	M12	125	90	146.0	293	373	16.0	0.42
R3844.016-ZP	M16	170	100	165.0	330	440	16.0	1.00
R3844.020-ZP	M20	200	105	180.0	360	490	18.0	1.66
R3844.024-ZP	M24	255	135	225.0	451	621	30.0	2.98
R3844.030-ZP	M30	255	140	255.0	451	611	30.0	4.28
R3844.036-ZP	M36	295	170	300.0	601	781	32.0	7.70