



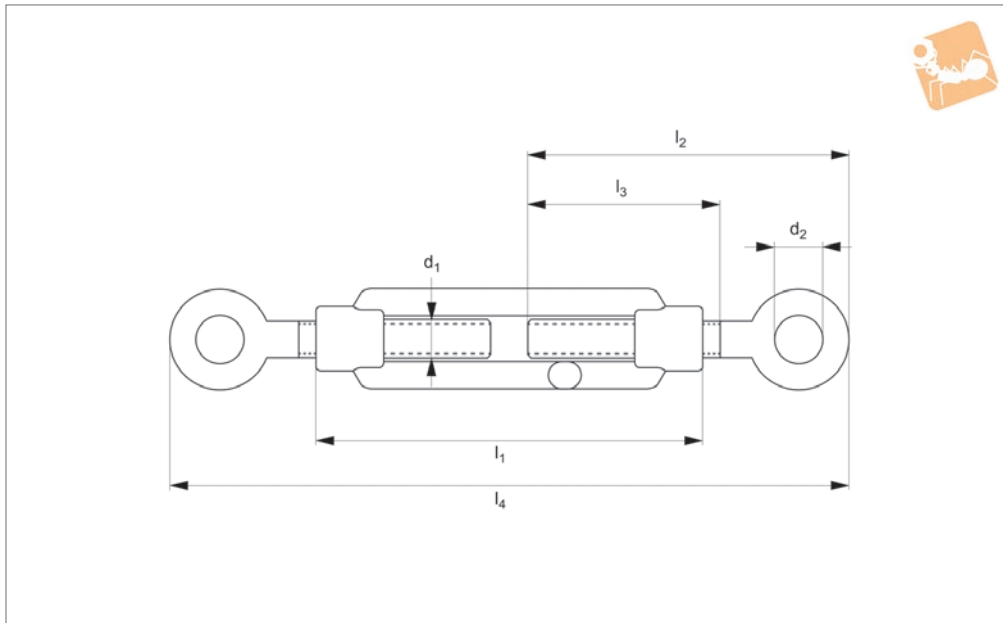

# Eye End Turnbuckles

steel

## Turnbuckles

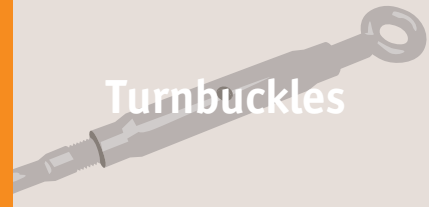

**R3840**

TURNBUCKLES

### Material

Steel (1.0037), zinc-plated.  
Hot dip galvanized body, available on request providing increased protection against corrosion. Please add -FZ for hot dip galvanized, e.g. R3804.006-FZ.

### Tips

Turnbuckles consist of a metal frame with right hand thread one end and left hand thread the other end. Used for tensioning by rotating turnbuckle body without twisting attached rope or cable.

**Only suitable for use in tension.**

### Technical Notes

To DIN 1480 eye to eye.

### Important Notes

**Turnbuckles are not to be used for lifting.**

Order No.	d <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub> min.	l <sub>4</sub> max.	d <sub>2</sub>	Weight kg
R3840.006-ZP	M 6	110	74	50	148	228	10	0.09
R3840.008-ZP	M 8	110	80	52	160	235	11	0.14
R3840.010-ZP	M10	125	95	59	191	276	15	0.25
R3840.012-ZP	M12	125	107	66	215	295	17	0.37
R3840.016-ZP	M16	170	146	85	292	402	22	0.90
R3840.020-ZP	M20	200	170	100	340	470	24	1.62
R3840.024-ZP	M24	255	213	134	427	597	33	2.72
R3840.030-ZP	M30	255	255	150	511	671	39	3.94
R3840.036-ZP	M36	295	260	150	521	701	37	7.20
R3840.042-ZP	M42	330	285	165	570	770	48	10.70
R3840.048-ZP	M48	355	335	185	671	866	58	19.10